AMBIC®

AUTO FOAMER

AAF/030 - PRESSURE TEST GAUGE KIT

The enclosed test gauge kit may be used for testing pressures within the AUTOFOAMER installation – either in the LOW PRESSURE liquid or air pressure lines in the locations 1, 2, or 3 shown in the diagram below.

During INITIAL setting up, both the liquid and air pressure should indicate 4-5psi; adjust air pressure for correct foam quality/wetness.

NOTE: USE ONLY FOR SETTING UP/ADJUSTMENT

- DO NOT LEAVE THE GAUGE FITTED IN THE LIQUID PRESSURE LINE ALL THE TIME.
- ALWAYS RINSE OUT GAUGE TUBING/CONNECTORS WITH CLEAN WATER AFTER USE WITH LIQUID / CHEMICAL & STORE IN DRY CONDITIONS.

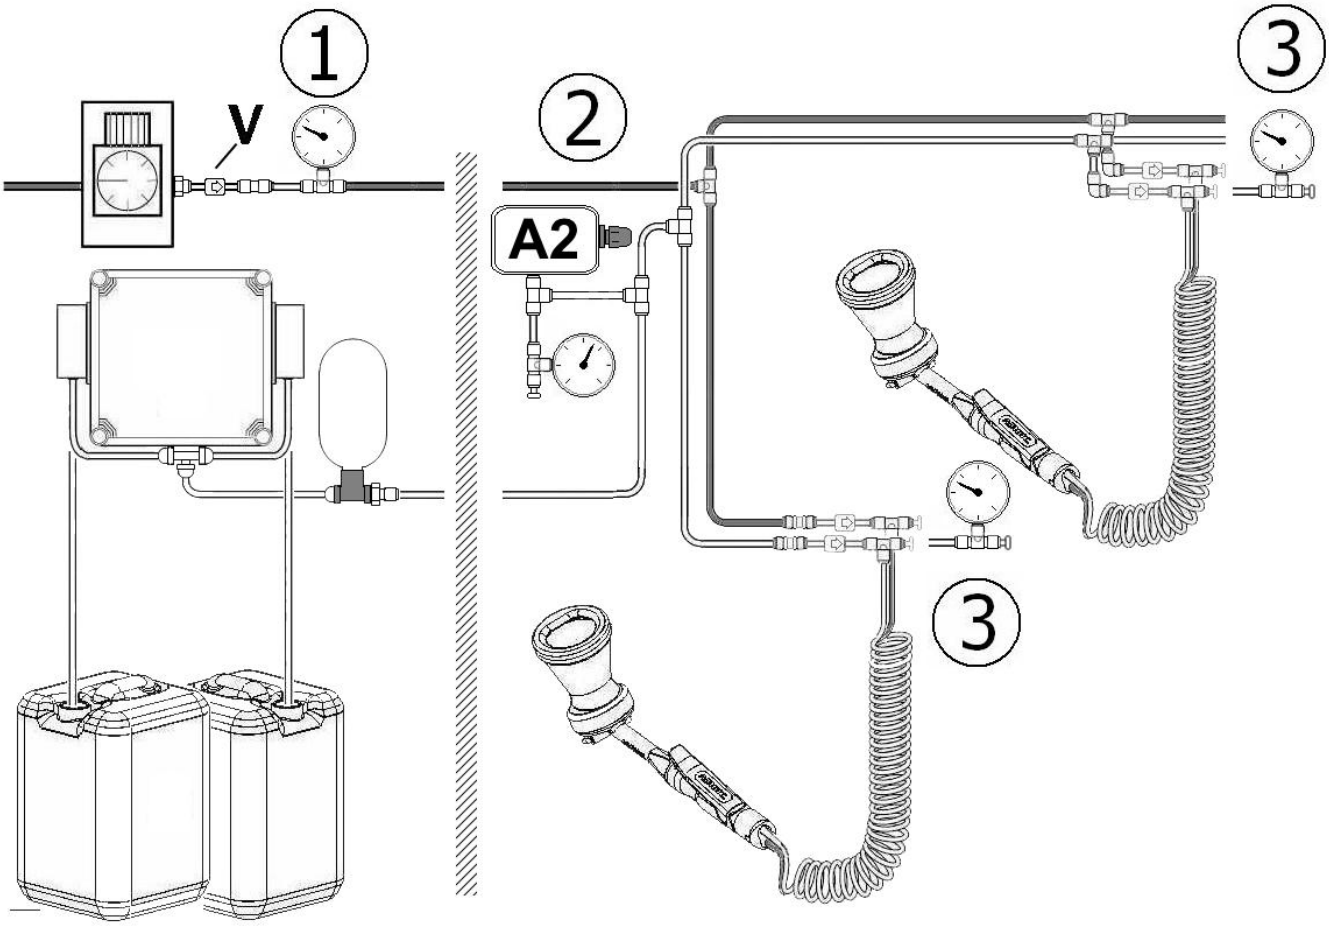

AMBIC®

AUTO FOAMER

AAF/030 - PRESSURE TEST GAUGE KIT

Ce kit de test à manomètre peut être utilisé pour vérifier les pressions internes de l'installation AUTOFOAMER - soit dans le liquide basse pression, ou de lignes de basse pression d'air dans les lieux **1**, **2** ou **3** (voir sur le diagramme ci-dessous).

Pendant le réglage initial, la pression d'air et de liquide doit être 4 à 5 psi; régler la pression d'air pour faire la bonne qualité de la mousse (à l'humidité correcte).
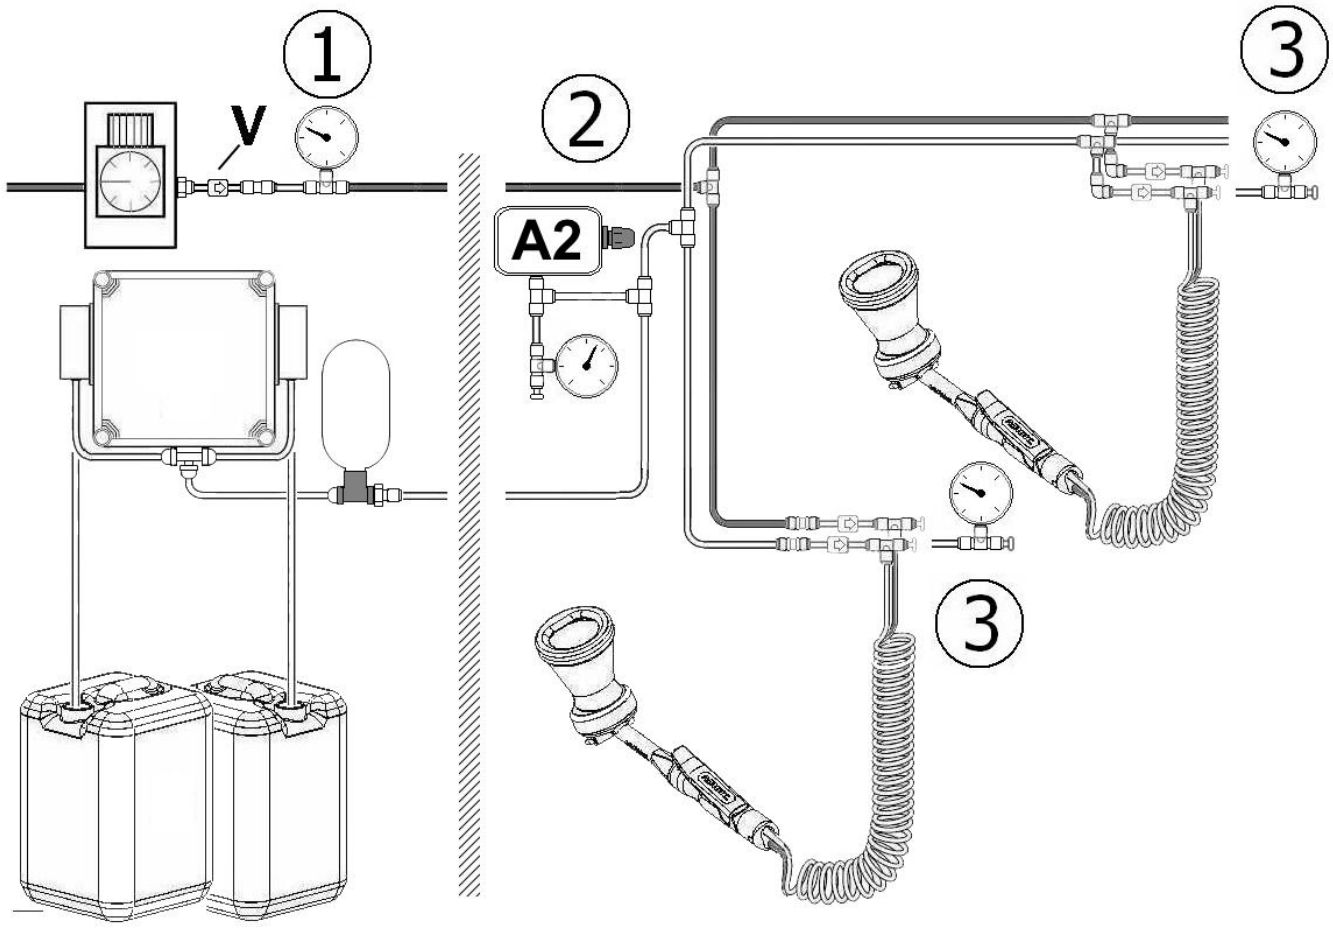
Noter bien :
1) Utilisez uniquement pour configurer.
2) NE JAMAIS LAISSER LE MANOMETRE RESTER EN LIGNE DE PRESSION (AIR ou LIQUIDE) TOUT LE TEMPS.
3) TOUJOURS RINCER L'INTERIEUR DU TUBE et MANOMETRE A L'EAU CLAIRE après l'utilisation avec LIQUIDE ou CHIMIQUES et conserver sec.